

FALCO EVO 628 S IT V8



11.217,00€

SKU: 1694302469 | **Categories:** [FALCO EVO 628 S](#), [FALCO EVO 628 S IT V8](#), [SICAM](#), [TYRE CHANGERS](#)

PRODUCT DESCRIPTION

Pneumatic tilting back pole passenger car tyre changers. It is equipped with a 28" (external clamping) turntable, a pneumatic positioning of the tool and a 4 position adjustable bead breaker. The extreme rigidity of the structure characterized by the use of the G-Frame concept made them market benchmark for robustness and solidity. The

absolute reduction of flexion of the operating arm makes really safe mounting and demounting operation of any kind of tyres, even the most difficult UHP or RFT. Tecnoroller NG helper system makes the work even easier and reduces the effort of the operator.

SCOPE OF DELIVERY



TECNOROLLER NG

1.971,00€

P/N: 1695903401



BRUSH

7,00€

P/N: 1695100123



QUICK-RELEASE COUPLING

2,00€

P/N: 1695042398



BAYONET CONNECTION

7,00€

P/N: 1695040325



BEAD LIFTER

32,00€

P/N: 1695102683



JAWS PLASTIC PROTECTION KIT

29,00€

P/N: 1695102148



PLASTIC PROTECTION KIT

25,00€

P/N: 1695106152



TOOL COVER

0,00€

P/N: 1695106569



PLASTIC GUARD SET FOR TOOLS

32,00€

P/N: 1695100083

ACCESSORIES



HIGH SPACING WEDGE

25,00€

P/N: 1695103216



SPACING WEDGE

26,00€

P/N: 1695103261



ROLLER BOARD FOR BEAD BREAKER

93,00€

P/N: 1695106190



PLASTIC PROTECTION KIT

25,00€

P/N: 1695106152



BEAD LOCKING PLIER

63,00€

P/N: 1695103302



MEMORY RING

31,00€

P/N: 1695107490



PRESSING CONE FOR OUTER CLAMPING

206,00€

P/N: 1695108055



KIT STORAGE WITHOUT MANOMETER

494,00€

P/N: 1695102584



SIDE LIFT NG


1.214,00€

P/N: 1695107469

FEATURES

FEATURES: FALCO EVO 628 S IT V8 1694302469

- The movement of the TTL allows to follow the profile of the rim facilitating the access of the tool and favoring a perfect extraction of the heel avoiding any effort on the part of the operator.
- 4 position adjustable bead breaker. Easily the user can regulate the bead breaker system based on his preferences
- Inflating system integrated in the jaws; faste bead seating of the tire on the rim
- New jaws plastic protections allow to save time when the user work with steel alloy rims
- G-Frame concept increases the rigidity of the machine shortnening the flow of the forces inside the machine. Make the machine as much rigid as possible.

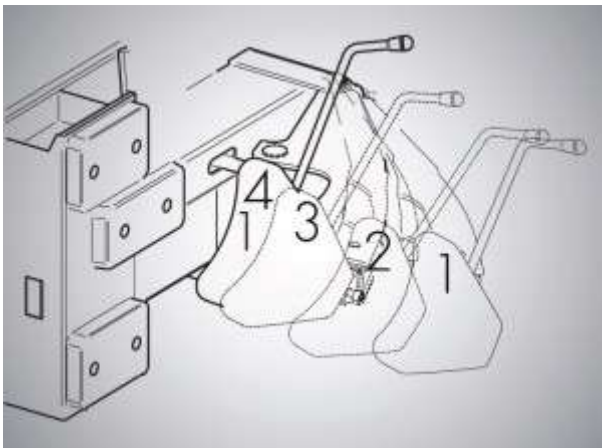

REDUCED EFFORT FOR THE OPERATOR –
INCREASED SAFETY AND SPEED!

- speed motor driven by electronic control (1ph). Possibility to work having always the best mix of power and speed available
- Pneumatic positioning of the mounting head. The user can control and position the mounting head only pressing and releasing a button
- Equipped with the new helper system Tecnoroller NG reduces the effort of the operator during the mounting-demounting process
- Ergo control (variant) allows to execute the operation of tire-beading always in an ergonomic working position, reducing the time with less effort while always being in a safe position.

USP

USP: FALCO EVO 628 S IT V8 1694302469

- G-Frame for stability, SAFE and innovative, functional design
- Bright yellow warning and knee protection safety signs at turntable cylinders (“yellow fin“)
- Save time thanks to 40 % faster bead breaking cylinder

TECHNICAL DATA

TECHN. DATA: FALCO EVO 628 S IT V8 1694302469

Outside rim clamping min.	12 “
Outside rim clamping max.	28 “
Inside rim clamping min.	13 “
Inside rim clamping max.	32 “
Rim width min.	3 “
Rim width max.	15 “
Max. wheel diameter	1200 mm
Bead breaker range min.	70 mm
Bead breaker range max.	397 mm
Air connection	8/10 bar
Dimensions (Wx Hx D)	1450 x 2295 x 2060 mm
Net weight	410 kg
Power Supply	230 V
Phase	1
Frequency	50-60 Hz
Speed of rotation	7/15 rpm
Current	23/24 A